




ARTIGO (REFERÊNCIA) <i>Producto</i> <i>Product</i>	GRULPV-100-24
SÉRIE <i>Serie</i> <i>Series</i>	LPV
TIPO <i>Tipo</i> <i>Type</i>	Transformador <i>Transformador</i> <i>Transformer</i>
TECNOLOGIA <i>Tecnología</i> <i>Technology</i>	Tensão constante AC/DC 24V <i>Tensión constante</i> <i>Constant voltage</i>
CÓDIGO DE BARRAS <i>Código de barras</i> <i>Barcode</i>	--
COR <i>Color</i> <i>Colour</i>	--
MATERIAL <i>Material</i> <i>Material</i>	Plástico <i>Plastico</i> <i>Plastic</i>
DIÂMETRO (D.) <i>Diámetro</i> <i>Diameter</i>	--
ALTURA (A.) <i>Altura</i> <i>Height</i>	3,7cm
COMPRIMENTO (C.) <i>Longitud</i> <i>Lenght</i>	19cm
LARGURA (L.) <i>Ancho</i> <i>Width</i>	5,2cm
PESO <i>Peso</i> <i>Weight</i>	600g

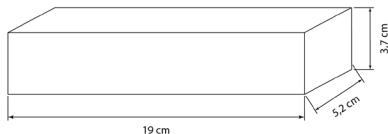

INFORMAÇÃO GERAL

Información General | *General Information*

Índice de proteção <i>Índice de Protección</i> <i>Protection Index</i>	IP67 <i>Tipo</i>
Classe de proteção <i>Clase de protección</i> <i>Protection class</i>	Classe II
Fator de potência <i>Factor de potencia</i> <i>Power factor</i>	--
Número de LED <i>Número de LED</i> <i>LED number</i>	--
Secção de entrada <i>Sección de entrada</i> <i>Input section</i>	--
Secção de saída <i>Sección de salida</i> <i>Output section</i>	--

INFORMAÇÃO TÉCNICA

Información técnica | *Technical information*

Tensão de entrada <i>Voltaje de entrada</i> <i>Input voltage</i>	100-240Vac
Frequência <i>Frecuencia</i> <i>Frequency</i>	50/60Hz
Potência <i>Potencia</i> <i>Power</i>	100W
Corrente de entrada (máx) <i>Corriente de entrada (máx)</i> <i>Input current (max)</i>	2,2A
Tensão de saída <i>Voltaje de salida</i> <i>Output voltage</i>	24Vdc
Corrente de saída <i>Corriente de salida</i> <i>Output current</i>	1,2A
Eficiência (%) <i>Eficiencia</i> <i>Efficiency</i>	86%
Temperatura ambiente (Ta) <i>Temperatura ambiente</i> <i>Ambient temperature</i>	-25..+70°C
Temperatura Invólucro (Tc) <i>Temperatura de la carcasa</i> <i>Case Temperature</i>	--
Isolação <i>Aislamiento</i> <i>Insulation</i>	--


PROTEÇÕES

Protecciones | *Protections*

Proteção curto circuito (SCP) <i>Protección contra cortocircuitos</i> <i>Short circuit protection</i>	Sim <i>Sí</i> <i>Yes</i>
Proteção sobrecarga (OPP) <i>Protección de sobrecarga</i> <i>Overload protection</i>	Sim <i>Sí</i> <i>Yes</i>
Proteção sobreaquecimento (OTP) <i>Protección contra sobretemperatura</i> <i>Over temperature protection</i>	--
Proteção sobretensões (OVP) <i>Protección contra sobretensiones</i> <i>Overvoltage protection</i>	Sim <i>Sí</i> <i>Yes</i>
Proteção de sobrecarga (L-N) <i>Protección de sobrecarga</i> <i>Surge protection</i>	--
Tremulação <i>Parpadeo</i> <i>Flicker</i>	--
Potência sem carga <i>Energia sin carga</i> <i>No-load power</i>	--



ARTIGO (REFERÊNCIA) <i>Producto</i> <i>Product</i>	GRULPV-100-24
SÉRIE <i>Serie</i> <i>Series</i>	LPV
TIPO <i>Tipo</i> <i>Type</i>	Transformador <i>Transformador</i> <i>Transformer</i>
TECNOLOGIA <i>Tecnología</i> <i>Technology</i>	Tensão constante AC/DC 24V <i>Tensión constante</i> <i>Constant voltage</i>
CÓDIGO DE BARRAS <i>Código de barras</i> <i>Barcode</i>	--
COR <i>Color</i> <i>Colour</i>	--
MATERIAL <i>Material</i> <i>Material</i>	Plástico <i>Plastico</i> <i>Plastic</i>
DIÂMETRO (D.) <i>Diámetro</i> <i>Diameter</i>	--
ALTURA (A.) <i>Altura</i> <i>Height</i>	3,7cm
COMPRIMENTO (C.) <i>Longitud</i> <i>Lenght</i>	19cm
LARGURA (L.) <i>Ancho</i> <i>Width</i>	5,2cm
PESO <i>Peso</i> <i>Weight</i>	60g

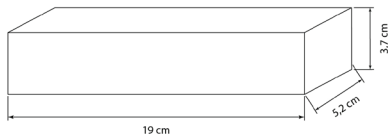

INFORMAÇÃO GERAL

Información General | *General Information*

Índice de proteção <i>Índice de Protección</i> <i>Protection Index</i>	IP67 <i>Tipo</i>
Classe de proteção <i>Clase de protección</i> <i>Protection class</i>	Classe II
Fator de potência <i>Factor de potencia</i> <i>Power factor</i>	--
Número de LED <i>Número de LED</i> <i>LED number</i>	--
Secção de entrada <i>Sección de entrada</i> <i>Input section</i>	--
Secção de saída <i>Sección de salida</i> <i>Output section</i>	--

INFORMAÇÃO TÉCNICA

Información técnica | *Technical information*

Tensão de entrada <i>Voltaje de entrada</i> <i>Input voltage</i>	100-240Vac
Frequência <i>Frecuencia</i> <i>Frequency</i>	50/60Hz
Potência <i>Potencia</i> <i>Power</i>	100W
Corrente de entrada (máx) <i>Corriente de entrada (máx)</i> <i>Input current (max)</i>	2,2A
Tensão de saída <i>Voltaje de salida</i> <i>Output voltage</i>	24Vdc
Corrente de saída <i>Corriente de salida</i> <i>Output current</i>	1,2A
Eficiência (%) <i>Eficiencia</i> <i>Efficiency</i>	86%
Temperatura ambiente (Ta) <i>Temperatura ambiente</i> <i>Ambient temperature</i>	-25..+70°C
Temperatura Invólucro (Tc) <i>Temperatura de la carcasa</i> <i>Case Temperature</i>	--
Isolação <i>Aislamiento</i> <i>Insulation</i>	--

PROTEÇÕES

Protecciones | *Protections*

Proteção curto circuito (SCP) <i>Protección contra cortocircuitos</i> <i>Short circuit protection</i>	Sim <i>Sí</i> <i>Yes</i>
Proteção sobrecarga (OPP) <i>Protección de sobrecarga</i> <i>Overload protection</i>	Sim <i>Sí</i> <i>Yes</i>
Proteção sobreaquecimento (OTP) <i>Protección contra sobrettemperatura</i> <i>Over temperature protection</i>	--
Proteção sobretensões (OVP) <i>Protección contra sobretensiones</i> <i>Overvoltage protection</i>	Sim <i>Sí</i> <i>Yes</i>
Proteção de sobrecarga (L-N) <i>Protección de sobrecarga</i> <i>Surge protection</i>	--
Tremulação <i>Parpadeo</i> <i>Flicker</i>	--
Potência sem carga <i>Energia sin carga</i> <i>No-load power</i>	--



■ Features :

- Constant voltage design
- Universal AC input / Full range
- Fully encapsulated with IP67 level (Note.7)
- Withstand 300VAC surge input for 5 seconds
- Protections: Short circuit / Overload / Over voltage
- Fully isolated plastic case
- Cooling by free air convection
- 100% full load burn-in test
- Low cost, high reliability
- Suitable for LED related fixture or appliance (such as LED Decoration or Advertisement devices)(Note.11)
- 2 years warranty



■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>


SPECIFICATION




MODEL	LPV-100-5	LPV-100-12	LPV-100-15	LPV-100-24	LPV-100-36	LPV-100-48	
OUTPUT	DC VOLTAGE	5V	12V	15V	24V	36V	48V
	RATED CURRENT	12A	8.5A	6.7A	4.2A	2.8A	2.1A
	CURRENT RANGE	0 ~ 12A	0 ~ 8.5A	0 ~ 6.7A	0 ~ 4.2A	0 ~ 2.8A	0 ~ 2.1A
	RATED POWER	60W	102W	100.5W	100.8W	100.8W	100.8W
	RIPPLE & NOISE (max.) Note.2	80mVp-p	120mVp-p	120mVp-p	150mVp-p	150mVp-p	150mVp-p
	VOLTAGE TOLERANCE Note.3	±8.0%	±5.0%				
	LINE REGULATION	±1.0%					
	LOAD REGULATION	±6.0%	±2.0%				
INPUT	SETUP, RISE TIME Note.6	2000ms, 25ms / 230VAC	2000ms, 25ms / 115VAC				
	HOLD UP TIME (Typ.)	50ms/230VAC	14ms/115VAC at full load				
	VOLTAGE RANGE Note.4	90 ~ 264VAC	127 ~ 370VDC				
	FREQUENCY RANGE	47 ~ 63Hz					
	EFFICIENCY (Typ.)	80%	85%	87%	88%	88%	89%
	AC CURRENT	2.2A/115VAC	1.2A/230VAC				
PROTECTION	INRUSH CURRENT(Typ.)	COLD START 75A(twidth=700µs measured at 50% Ipeak) at 230VAC					
	OVERLOAD	110 ~ 150% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed					
	OVER VOLTAGE	5.75 ~ 6.75V	13.8 ~ 16.2V	17.25 ~ 20.25V	27.6 ~ 32.4V	41.4 ~ 48.6V	55.2 ~ 64.8V
ENVIRONMENT	MAX. No. of PSUs on 16A CIRCUIT BREAKER	2 units (circuit breaker of type B) / 3 units (circuit breaker of type C) at 230VAC					
	LEAKAGE CURRENT	0.25mA / 240VAC					
	WORKING TEMP.	-25 ~ +70°C (Refer to "Derating Curve")					
	WORKING HUMIDITY	20 ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH					
SAFETY & EMC	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)					
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes					
	SAFETY STANDARDS	UL8750, CSA C22.2 No 250.13-12, UL879, CSA C22.2 No.207-M89, BIS IS15885(Note12), EAC TP TC 004, IP67, IEC62368-1, BS EN/EN62368-1 approved					
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC					
OTHERS	ISOLATION RESISTANCE	I/P-O/P:>100M Ohms / 500VDC / 25°C / 70% RH					
	EMC EMISSION	Compliance to BS EN/EN55032 (CISPR32) Class B, BS EN/EN61000-3-2 Class A (<=80% load), BS EN/EN61000-3-3, EAC TP TC 020					
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN55035, light industry level, EAC TP TC 020					
NOTE	MTBF	4497.1K hrs min. Telcordia SR-332 (Bellcore); 681.6Khrs min. MIL-HDBK-217F (25°C)					
	DIMENSION	190*52*37mm (L*W*H)					
	PACKING	0.63Kg;20pcs/13.6Kg/0.55CUFT					
<p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. Derating may be needed under low input voltage. Please check the static characteristics for more details.</p> <p>5. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf)</p> <p>6. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time.</p> <p>7. Suitable for indoor use or outdoor use without direct sunlight exposure.</p> <p>8. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</p> <p>9. Products sourced from the Americas regions may not have the TUV/BIS/CCC logo. Please contact your MEAN WELL sales for more information.</p> <p>10. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf</p> <p>11. This product is not intended for LED lighting luminaire applications in the EU.(In the EU the LPF/NPF/XLG series are recommended.)</p> <p>12. R-41027766 (GZ factory) only for 12V,24V / R-62002178 (ID factory) for 5V~48V</p> <p>※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx</p>							

■ Mechanical Specification


Case No. LPC-100A Unit:mm

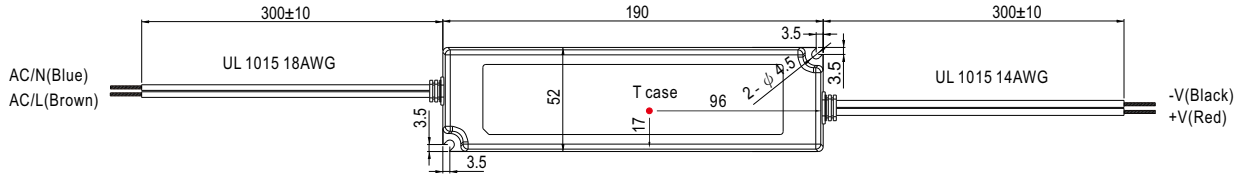


※ T case: Max. Case Temperature.




■ Recommend Mounting Direction



■ Block Diagram

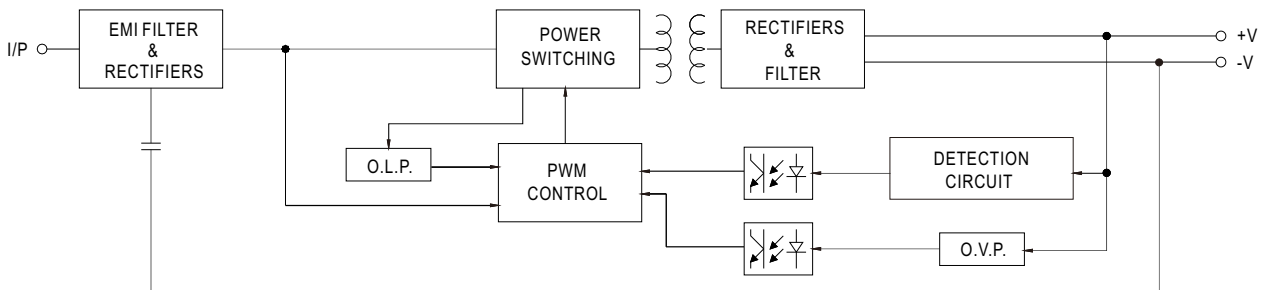

■ Derating Curve

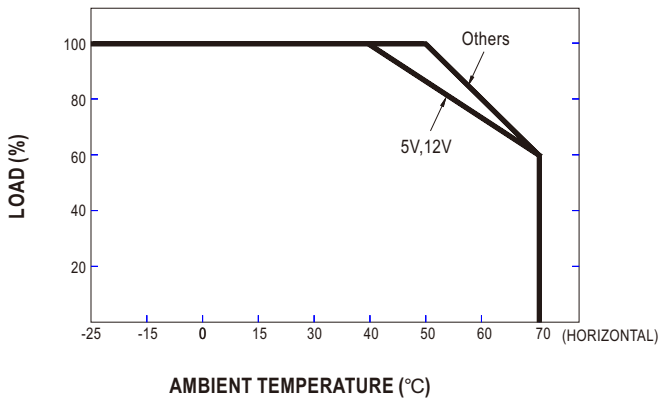

■ Static Characteristics

